


As the Beta firmware is still under test, we hope that you can understand there might exist some bugs or problems. Please use them with caution, and not for important purposes. If you have any questions or encounter any problems during usage, feel free to contact us via service@insta360.com.

If you want to degrade from Beta firmware to the lower version firmware, follow the steps as below:

Firstly, please unlock the camera's firmware degrade limit.
Use the Pro PC of 1.3.0 version or above to connect to the current camera.

When the camera is connected, open the “Camera settings” and click the "Unlock firmware degrade" under the camera icon. Once unlocked, the camera can be updated to any version of the firmware in normal updating way.

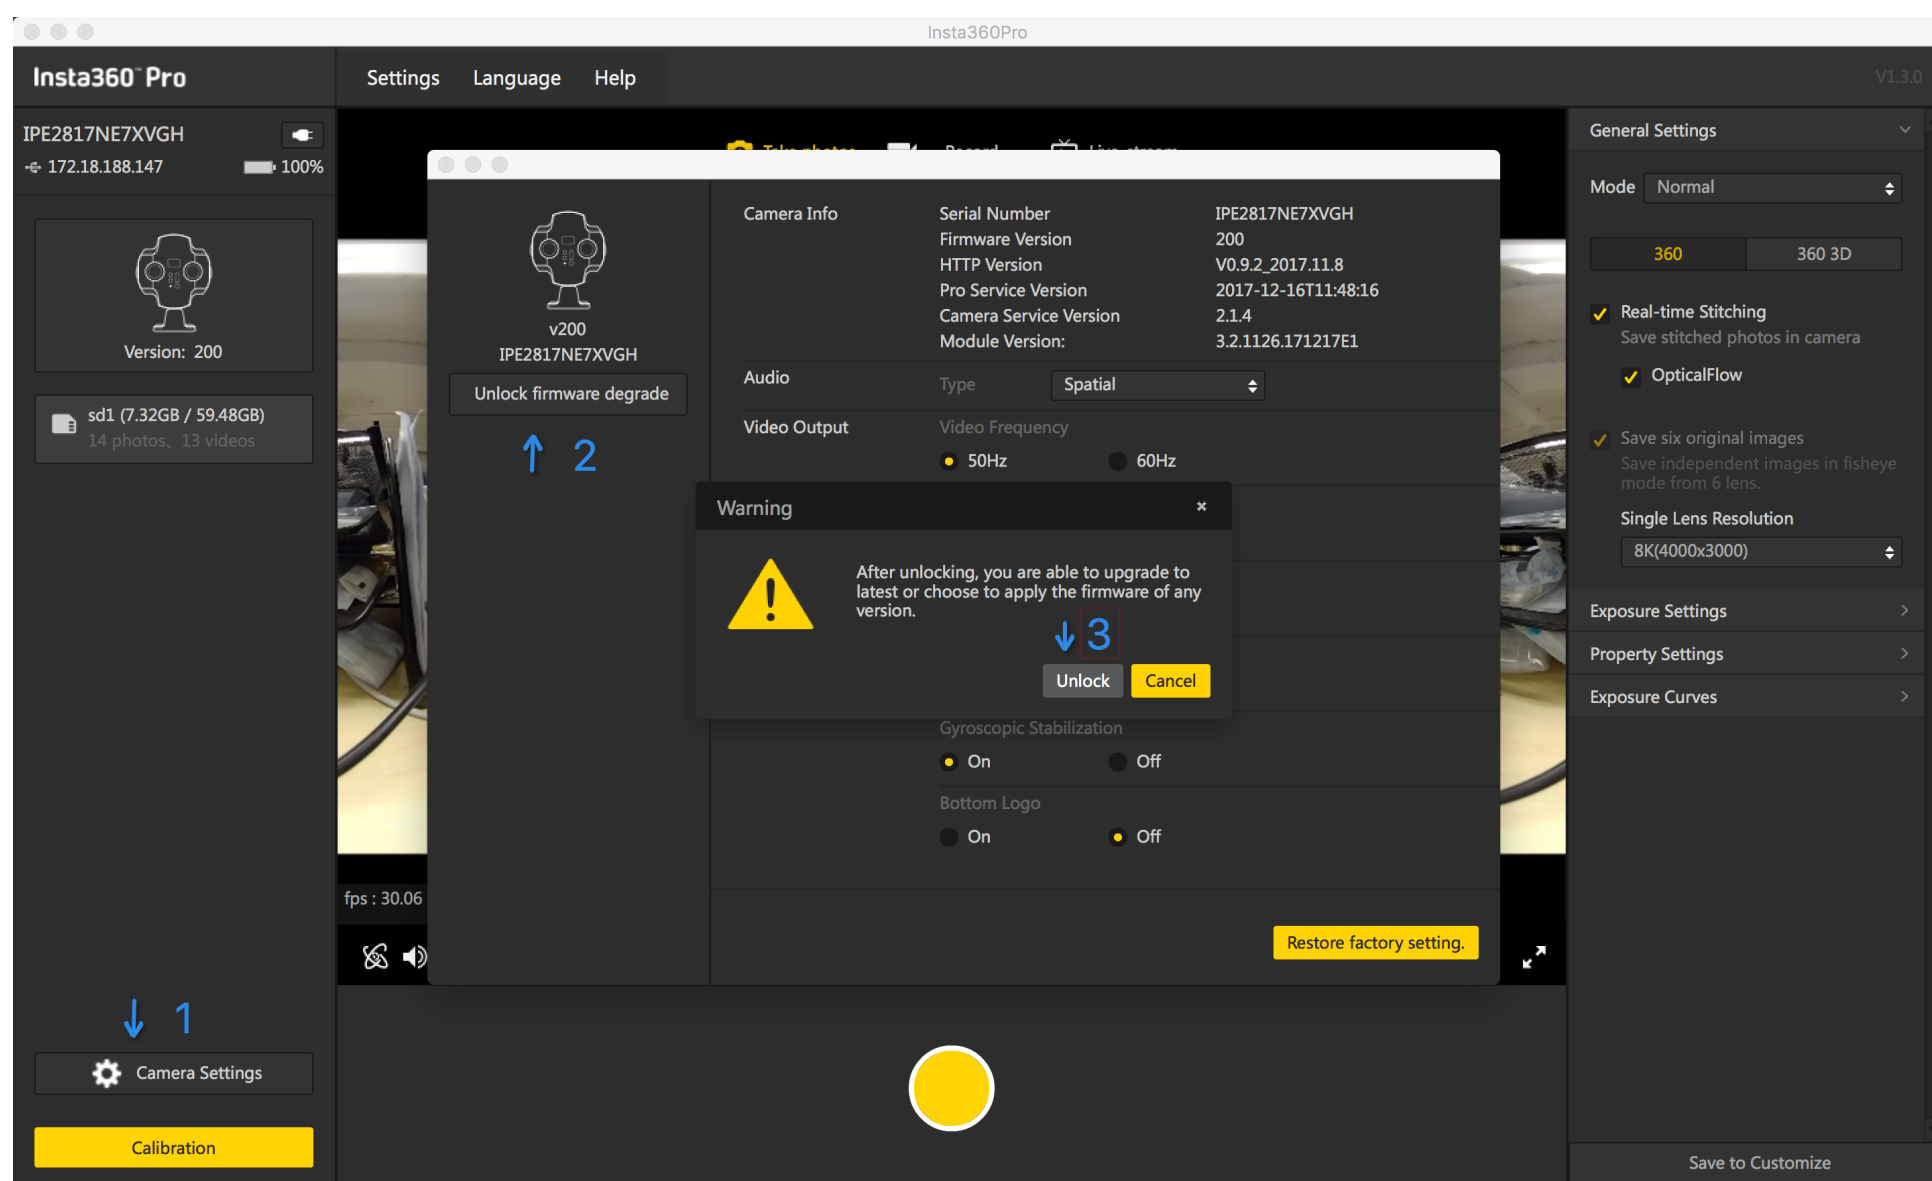

Firmware upgrade with booting:

1. Please make sure that the battery is not lower than 30% and is connected to power adapter. The camera may be booted by pressing “POWER” key in the power-off state.
2. Insert the SD card with the latest firmware into the camera.

Notice: please make sure you have deleted the old firmware bin file, and keep the file name (Insta360_Pro_Update.bin) of the newly downloaded firmware unchanged, or the system might not be able to identify the latest firmware automatically, thus cannot upgrade normally.

3. Restart the camera after getting above preparation done, the camera will enter upgrading stage, during which it is upgrading the firmware. Once it has completed, it will restart again.
4. You can click "Info" in the setting to check out the camera version and Pro Serial Number.

Beta 版固件仍处于验证测试阶段，会存在一些Bug 或问题，请谨慎使用，勿用于重要用途。使用过程中如有任何问题或建议，请联系 service@insta360.com 。


如果想从 Beta 版固件降级至低版本固件，请进行以下操作：

首先请解锁相机的固件降级限制：

使用1.3.0及以上版本的 Pro PC 客户端，连接上当前的相机。

在连接状态下点击相机设置，在界面的相机图标下点击“解锁固件降级限制”。

确认解锁后，相机便可以通过常规的固件升级方法更新任一版本的固件。

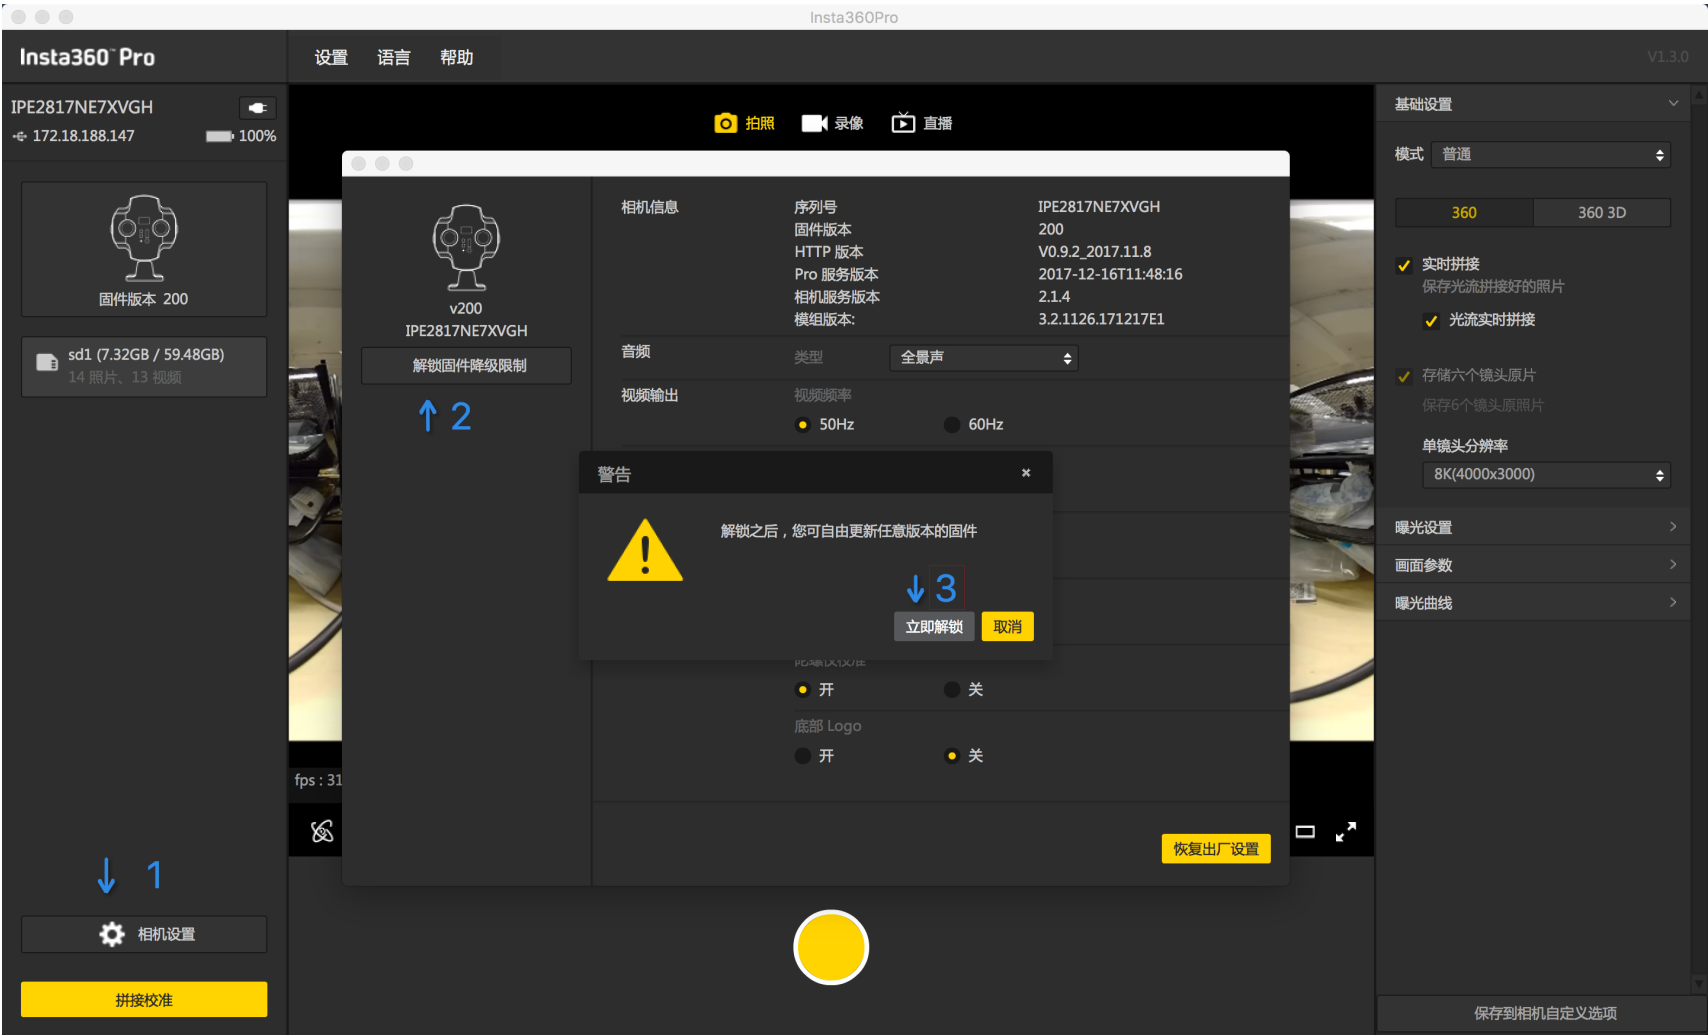

相机如何进行固件升级？

1. 请务必确保相机电池电量在30%以上，并且接好电源适配器。
2. 然后将拷贝有最新固件的 SD 卡插入相机。
(请注意将旧的bin文件删除，保持解压后的固件文件名“Insta360_Pro_Update.bin”不要被修改，否则系统将无法自动识别固件，不能正常升级)
3. 准备好以上步骤后，重启相机，开机过程中相机进入 Updating 状态，即正在更新固件。更新完毕后相机会自动重启。
4. 可以在相机的设置功能中，点击 Info 查看相机的系统版本以及序列号等信息。